

120t MODULAR SPREADER BAR

MAXIRIG PRODUCT CODE
MAXIBAR120

Maxirig

QUALITY LIFTING SOLUTIONS

DESCRIPTION

Maximum capacity	130.0 tonne at 60° included sling angle (at 12.0Mtrs span)
Tare weight:	2,915kg Fully Assembled (excl. shackles or rigging gear)
Lifting Lugs (top) suit:	85 tonne Grade 'S' safety bow shackle
Lifting Lugs (lower) suit:	85 tonne Grade 'S' safety bow shackle

PRODUCT ASSURANCE


Parent Standard:	AS4991
Proof Load Testing	Yes
MPI Weld Inspection	Yes
Manufacturer's Guarantee	1 Year

LOAD CHART

Span (Mtrs)	WLL (tonnes)			Approx Sling Leg Length (Mtrs)			Approx Headroom (Mtrs)			END LUGS	Modules					
	60°	90°	120°	60°	90°	120°	60°	90°	120°		0.3m	0.5m	1.0m	1.5m	3.0m	4.0m
2.0	130	106	75	2.0	1.4	1.0	1.7	1.0	0.6	2	1					
2.5	130	106	75	2.5	1.8	1.3	2.2	1.3	0.7	2	1	1				
3.0	130	106	75	3.0	2.1	1.5	2.6	1.5	0.9	2	1		1			
3.5	130	106	75	3.5	2.5	1.8	3.0	1.8	1.0	2	1	1	1			
4.0	130	106	75	4.0	2.8	2.0	3.5	2.0	1.2	2	1	1		1		
4.5	130	106	75	4.5	3.2	2.3	3.9	2.3	1.3	2	1		1	1		
5.0	130	106	75	5.0	3.5	2.5	4.3	2.5	1.4	2	1				1	
5.5	130	106	75	5.5	3.9	2.8	4.8	2.8	1.6	2	1	1			1	
6.0	130	106	75	6.0	4.2	3.0	5.2	3.0	1.7	2	1					1
6.5	130	106	69	6.5	4.6	3.3	5.6	3.3	1.9	2	1	1				1
7.0	130	106	69	7.0	4.9	3.5	6.1	3.5	2.0	2	1		1			1
7.5	130	106	64	7.5	5.3	3.8	6.5	3.8	2.2	2	1	1	1			1
8.0	130	106	64	8.0	5.7	4.1	6.9	4.1	2.3	2	1	1		1		1
8.5	130	102	59	8.5	6.0	4.3	7.4	4.3	2.5	2	1		1	1		1
9.0	130	102	59	9.0	6.4	4.6	7.8	4.6	2.6	2	1				1	1
9.5	130	93	53	9.5	6.7	4.8	8.2	4.8	2.7	2	1	1			1	1
10.0	130	93	53	10.0	7.1	5.1	8.7	5.1	2.9	2	1					2
10.5	130	84	48	10.5	7.4	5.3	9.1	5.3	3.0	2	1	1				2
11.0	130	84	48	11.0	7.8	5.6	9.5	5.6	3.2	2	1		1			2
11.5	130	75	43	11.5	8.1	5.8	10.0	5.8	3.3	2	1	1	1			2
12.0	130	75	43	12.0	8.5	6.1	10.4	6.1	3.5	2	1	1		1		2
12.5	117	68	39	12.5	8.8	6.3	10.8	6.3	3.6	2	1		1	1		2
13.0	117	68	39	13.0	9.2	6.6	11.3	6.6	3.8	2	1	1	1	1		2
13.5	105	61	35	13.5	9.5	6.8	11.7	6.8	3.9	2	1	1			1	2
14.0	105	61	35	14.0	9.9	7.1	12.1	7.1	4.0	2	1		1		1	2
14.5	95	54	31	14.5	10.3	7.4	12.6	7.4	4.2	2	1			1	1	2
15.0	95	54	31	15.0	10.6	7.6	13.0	7.6	4.3	2	1	1		1	1	2
15.5	85	49	28	15.5	11.0	7.9	13.4	7.9	4.5	2	1		1	1	1	2
16.0	85	49	28	16.0	11.3	8.1	13.9	8.1	4.6	2	1	1	1	1	1	2

IMPORTANT

Prior to conducting any operations with this device, a lift study must be undertaken noting the capacity and tare weights of the device in its various configurations.

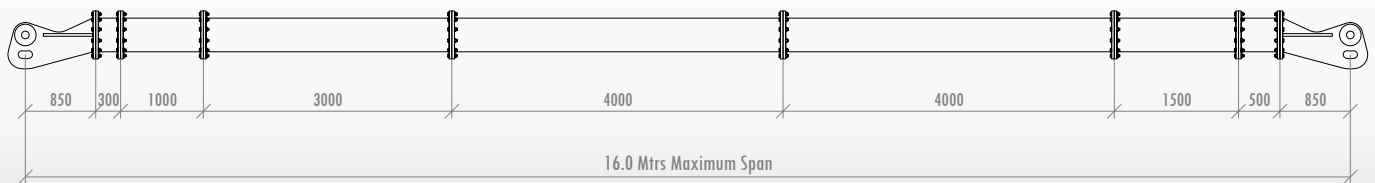

WE PROVIDE SUPERIOR QUALITY LIFTING PRODUCTS AUSTRALIA WIDE

All Maxirig products are designed and manufactured in Australia by our highly skilled team of engineers and boilermakers.

VISIT WWW.MAXIRIG.COM.AU