
## **1 Ot** TELESCOPIC SPREADER BEAM



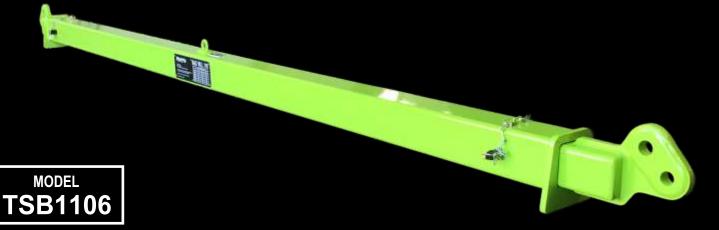

## **SPECIFICATION**


Tare Weight:	0.160t (Excl. slings/shackles)
Lifting lugs (top) suit:	8.5t Grade S bow shackle
Load lugs (lower) suit:	6.5t Grade S bow shackle
Centre lug suits:	Self lift only

## ASSURANCE

Compliance Standard:	AS4991-2004
Proof load tested:	Yes
NDT Weld Inspection:	Yes
Standard Finish*:	Painted (G36 Green)
*Other colours/finishes available on request	

Other colours/finishes available on reques

Span	WLL (at included sling angle)			Approx. Sling Leg Length (Mtrs)			Approx. Headroom (Mtrs)			
(Mtrs) 60 ° 90 ° 120 ° LIFT	CENTRE LIFT	<b>60</b> °	<b>90</b> °	<b>120</b> °	<b>60</b> °	<b>90</b> °	<b>120</b> °			
4.0m	10t	10t	6t	NA	4.0	2.8	2.3	3.5	2.0	1.2
4.4m	10t	10t	6t	NA	4.4	3.1	2.5	3.8	2.2	1.3
4.8m	10t	10t	6t	NA	4.8	3.4	2.8	4.2	2.4	1.4
5.2m	10t	10t	6t	NA	5.2	3.7	3.0	4.5	2.6	1.5
5.6m	10t	10t	6t	NA	5.6	4.0	3.2	4.9	2.8	1.6
6.0m	10t	10t	6t	NA	6.0	4.2	3.5	5.2	3.0	1.7

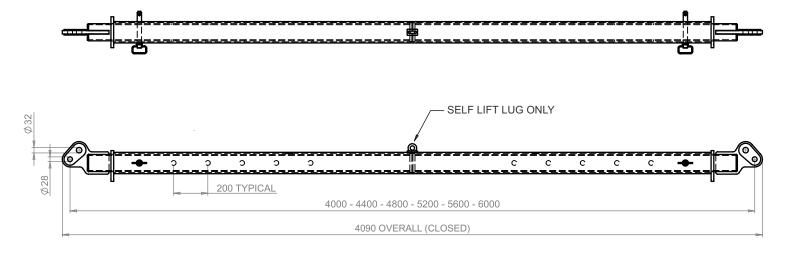



LOAD CHART